


Mad Axe Amps



MA-DTH15 – 15W Head

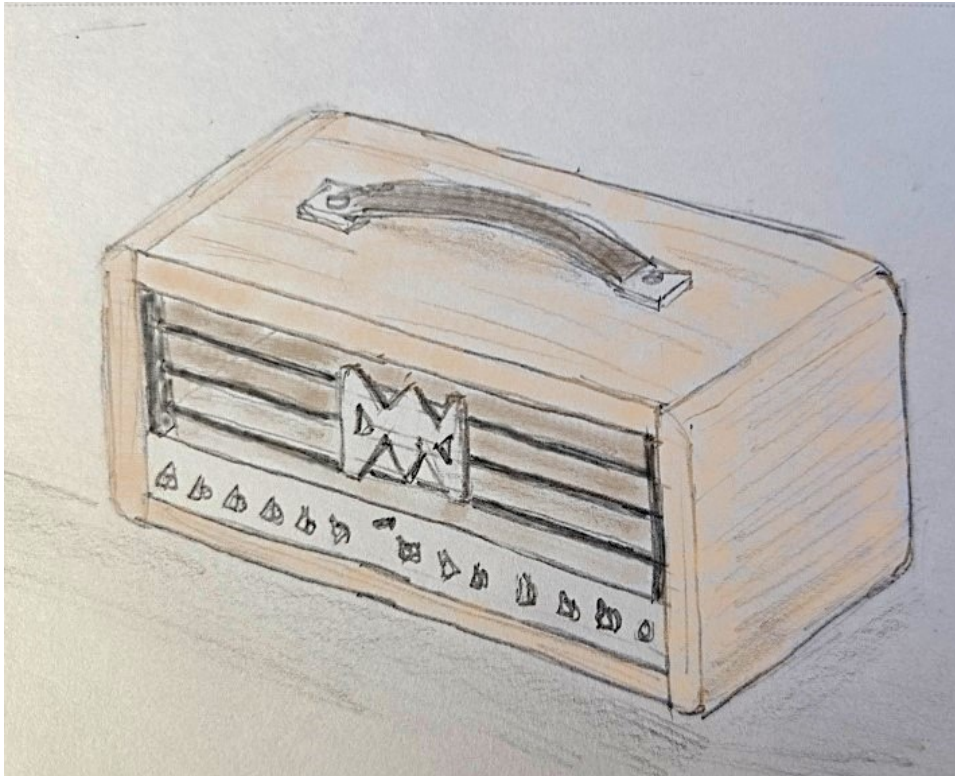

MA-DTC15 – 15W Combo

Same visual concept except having cloth speaker grill instead of metal rod 'grill'

Combo to have controls to front.

Power-on illuminated Mad Axe logo on top left of combo speaker grill

Mad Axe Amps



MA-DTH15 (15W amp head), MA-DTC15 (15W combo)

Technical Specification:

- ◇ 2-channel pre-amp switchable from front panel or footswitch (not supplied)
 - ◇ Channel 1—classic British-style valve/tube overdrive voicing (1x ECC83/12AX7) with independent drive and boost gain. Bass, middle & treble tone stack .
 - ◇ Channel 2—uses a cathode follower gain stage (1x ECC83/12AX7) and ‘bluesy’ voicing; rich in deeper, smoother tones and crunchy overdrive. Independent drive and boost gain. Bass, middle & treble tone stack.
- ◇ Effects loop (send and return driven by 1x ECC83/12AX7)
- ◇ 1x ECC83/12AX7 long-tailed pair phase-invertor
- ◇ Push-pull pentode output stage, cathode-biased (2x EL84L)
- ◇ Switchable power output; 7W or 15W
- ◇ 8 and 16 ohm speaker outputs
- ◇ Standby switch

MA-DTC15 only:

- ◇ *10" 25W Jensen Special Design alnico magnet loudspeaker*

Cosmetic:

- ◇ 20mm European white oak casing, sanded natural finish
- ◇ Control knobs to front
- ◇ Mad Axe logo power-on illuminator
- ◇ Leather carry handle
- ◇ Chicken head style knobs for all pots
- ◇ Toggle-style switches for power and standby on front panel
- ◇ 1/4" socket to rear for channel footswitch (transistorised switching design so length of footswitch cable not important)
- ◇ 1/4" sockets to rear for effects loop send & return

Mad Axe Amps



Contact:

enquiries@madaxeamps.co.uk

Instagram: madaxeamps

Web: <https://madaxeamps.co.uk>